



Physical Features

Model	GZY-X7512
Size	75(L)mm x 12(W) x 1.5(H)mm
Material	Textile
Colour	White
Working Temp	-25~+110
Storage Temp	-40~+85
Installation Methods	215 @12-15 seconds heat sealing or thread installation (sewing)
Chemicals	Normal common chemicals in the washing processes
Mechanical Resistance	Up to 60 bars
Operating Temp	1) Washing: 90 (194oF), 15 minutes, 200 cycle 2) Pre-drying in Tumbler: 180 (320oF), 30minutes 3) Ironer: 180 (356 o F), 10 seconds, 200 cycles 4) Sterilization Process: 135 (275oF), 20 minutes
Package details	500Pcs/bags
Weight	0.6g

RFID Features

Protoccol Standard	EPC CLASS1 GEN2, ISO 18000-6C
Working Frequency	865-868Mhz, 902-928Mhz(Customized)
Chip Type	NXP Ucode 8, Ucode9; M730
EPC Memory	96-128bit TID:64bit
Read distance	1-8m (depend on reader performance)
Estimated Lifetime	200 washing cycles or 2 years
Re-Write	100,000times
Data Storage	>10 years

Focus on RFID Solutions



Others Features:

Application	<ul style="list-style-type: none"> ●Management of uniforms ●Medical apparel management ●Military clothing management ●Personnel patrol management.
-------------	--


IP Rating

IP68


Dimensions:(mm)

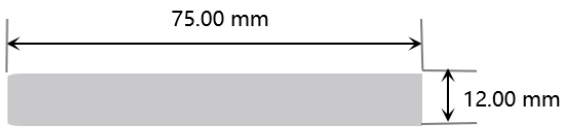

US Test

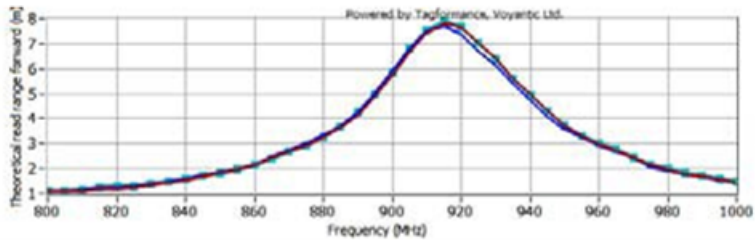

EU Test

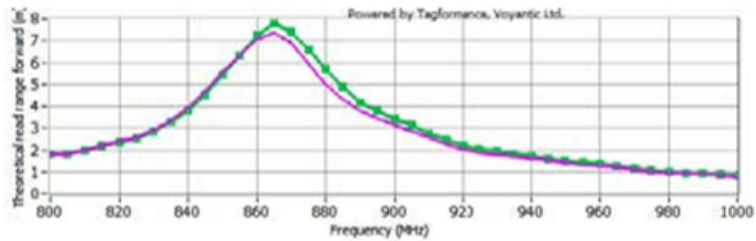

Note: Our company may optimize products in response to market changes, and any changes will be made without prior notice, please understand!



SHENZHEN INFO WISE TECHNOLOGY CO.,LTD.

Web: www.infowiserfid.com Email: sales@infowiserfid.com Tel : 153-6140-7827 office tel : 0755-21005073

Add: Address: 1101 & 1102, Building 5A, Huaqiang Creative Industry Park, Guangming Sub-district, Guangming District, Shenzhen City, Guangdong Province, P.R. China